



NBCG Metal Cable Glands – Metric Thread



Metal Cable Gland with Adjustable Inserts for Liquid Tight Cable Sealing.

Characteristics :

- Body: Brass with Nickel Plating Treatment
- Adjustable Insert: Polyamide-6
- Seal Material: TPE/TPE-V/EPDM/NBR
- Metric Threads conforming to IEC 60423
- Protection Degree: IP-68
- Free of Halogens, Cadmium, Sulphur & Phosphorous

Applications



Rail Vehicles



Earth Moving Equipment




Industrial Machinery



Solar & Wind Installations

- Insert Material-(X)
- NBR – NB
- EPDM – EP
- TPE – TE
- TPE-V – TV

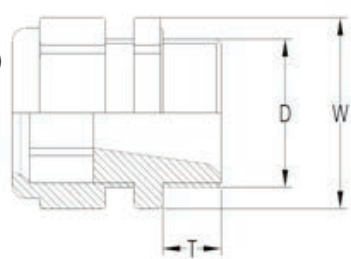

DIMENSIONAL DETAILS

Part No.	Thread Size	Thread Length T (mm)	Dimension D (mm)	Sealing Range (Min-Max) mm	Wrench Size (mm)	PPQ (nos.)
NBCG-M12-X-R 3.0-6.5	M12X1.5	6	12	3.0 – 6.5	14	100
NBCG-M16-X-R 4.0-8.0	M16X1.5	7	16	4.0 – 8.0	18	100
NBCG-M16-X-R 5.0-10.0	M16X1.5	7	16	5.0 – 10.0	20	100
NBCG-M20-X-R 5.0-10.0	M20X1.5	7	20	5.0 – 10.0	22	50
NBCG-M20-X-R 6.0-12.0	M20X1.5	7	20	6.0 – 12.0	22	50
NBCG-M20-X-R 10.0-14.0	M20X1.5	7	20	10.0 – 14.0	24	50
NBCG-M25-X-R 10.0-14.0	M25X1.5	8	25	10.0 – 14.0	28	25
NBCG-M25-X-R 10.0-16.0	M25X1.5	8	25	10.0 – 16.0	28	25
NBCG-M25-X-R 13.0-18.0	M25X1.5	8	25	13.0 – 18.0	30	25
NBCG-M32-X-R 11.0-18.0	M32X1.5	9	32	11.0 – 18.0	36	20
NBCG-M32-X-R 15.0-22.0	M32X1.5	9	32	15.0 – 22.0	36	20
NBCG-M32-X-R 18.0-25.0	M32X1.5	9	32	18.0 – 25.0	40	20
NBCG-M40-X-R 18.0-25.0	M40X1.5	10	40	18.0 – 25.0	45	20
NBCG-M40-X-R 22.0-28.0	M40X1.5	10	40	22.0 – 28.0	45	20
NBCG-M40-X-R 22.0-32.0	M40X1.5	10	40	22.0 – 32.0	50	20
NBCG-M50-X-R 32.0-38.0	M50X1.5	10	50	32.0 – 38.0	55	10
NBCG-M63-X-R 37.0-44.0	M63X1.5	12	63	37.0 – 44.0	70	5
NBCG-M63-X-R 42.0-53.0	M63X1.5	12	63	42.0 – 53.0	75	5