




SSBP Stainless Steel Over Braided Polyamide Conduits

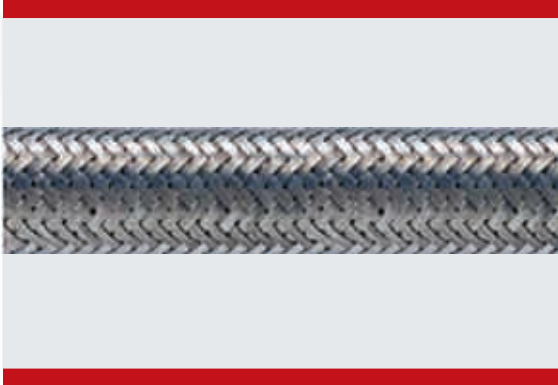

Flexible Corrugated Polyamide 6 conduit with Stainless Steel Over braiding which offers excellent flexibility combined with Shielding properties

Characteristics :

- Highly Flexible
- Excellent Shielding
- Resistant to Oils, Acids & Solvents

Temperature range : -40°C to +120°C
Short Term : +150°C
Flammability : UL94 V-0
Protection Degree : IP68

Applications



Railways



Defence



Telecommunications

| Part Number | Size | Inner Dia (mm) | Outer dia (mm) | Static Radius (mm) | PPQ (mtr) |
|-------------|--------|----------------|----------------|--------------------|-----------|
| SSBP-1/4 | 1/4" | 6.5 | 10.5 | 15 | 200 |
| SSBP-5/16 | 5/16" | 10 | 13.5 | 20 | 100 |
| SSBP-3/8 | 3/8" | 12 | 16.3 | 30 | 100 |
| SSBP-1/2 | 1/2" | 16 | 21.7 | 40 | 100 |
| SSBP-3/4 | 3/4" | 22 | 29 | 50 | 100 |
| SSBP-1 | 1" | 28 | 35.2 | 60 | 50 |
| SSBP-1 1/4 | 1 1/4" | 36 | 43.2 | 80 | 25 |
| SSBP-2 | 2" | 46.5 | 55.2 | 100 | 25 |